






SRC-DP SERİ TEKNİK ÖZELLİKLERİ

KİLİTLEME ÜNİTESİ		SRC 600-DP	SRC 800-DP	SRC 1000-DP	SRC 1200-DP	SRC 1400-DP
Kilitleme Kuvveti	kN	6000	8000	10000	12000	14000
Kilitleme Mesafesi	mm	900 - 1450	1000 - 1600	1200 - 1850	1300 - 2000	1600 - 2400
Kolonlar Arası Mesafesi (Y x D)	mm	880 x 880	1100 x 950	1200 x 1000	1300 x 1100	1500 x 1300
Minimum Kalıp Boyutları (Y x D)	mm	616 x 616	770 x 665	840 x 700	910 x 770	1050 x 910
Kalıp Kalınlığı (min.-maks.)	mm	350 - 900	400 - 1000	450 - 1100	500 - 1200	600 - 1400
Açma Kuvveti	kN	176	199	223	275	303
Açma Hızı	mm/s	1112	1330	1244	1192	1453
Kapama Hızı	mm/s	996	1321	1356	1145	1514
Maks. Aralık Mesafesi	mm	1800	2000	2300	2500	3000
İtici Kuvveti	kN	110	166	166	198	232
İtici Mesafesi	mm	250	300	300	350	350
İtici Sayısı	ad.	21	21	21	29	29
Dry cycle (Euromap 6)	s	4	5.1	5.4	5.8	6.2

ENJEKSİYON ÜNİTESİ		3300			5300			7100			9600			15000		
		A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
Vida çapı	mm	70	80	90	80	90	100	90	100	110	100	110	120	120	130	140
Vida L/D Oranı	L/D	25.1	22.0	19.6	24.8	22.0	19.8	24.4	22.0	20.0	24.2	22.0	20.2	23.8	22.0	20.4
Enjeksiyon Hacmi	cm ³	1478	1930	2443	2262	2863	3534	3181	3927	4752	4320	5227	6220	7351	8628	10006
Enjeksiyon Ağırlığı (PS)	g	1330	1737	2199	2036	2577	3181	2863	3534	4277	3888	4704	5598	6616	7765	9005
Enjeksiyon Basıncı	bar	2280	1740	1380	2290	1810	1470	2180	1760	1460	2150	1780	1490	2140	1820	1570
Enjeksiyon Kapasitesi (PS)	g/s	406	530	670	574	727	898	663	818	990	745	902	1073	1051	1234	1431
Mal Alma Kapasitesi (PS)	g/s	55	71	90	59	75	103	75	103	138	109	138	188	157	184	230
Enjeksiyon Hızı	mm/s		105			114			104			95			93	
Enjeksiyon Mesafesi	mm		384			450			500			550			650	
Vida Hızı	rpm		160			125			125			125			100	
Enjeksiyon Ünitesi Kuvveti	kN		165			204			204			204			261	
Grup Mesafesi	mm		500			650			700			750			850	

GENEL BİLGİLER		SRC 600-DP	SRC 800-DP	SRC 1000-DP	SRC 1200-DP	SRC 1400-DP
Motor Gücü	kW	37.7+27.2+4+5.5	56.5+37.7+4+5.5	56.5+46.1+4+5.5	56.5*2+4+5.5	56.5*2+46.1+4+5.5
Isıtıcı Bölge Sayısı	ad.	6+1	6+1	6+1	6+1	6+1
Isıma Gücü	kW	34	47	51	56	89
Makine Ölçüleri (U x G x Y)	m	7.5 x 2.5 x 2.3	9.3 x 3.0 x 2.4	9.6 x 3.0 x 2.4	10.6 x 3.4 x 2.6	12.6 x 3.7 x 2.7
Hidrolik Yağ Kapasitesi	L	750	1000	1200	1300	1900
Makine Ağırlığı (Kilitleme + Enjeksiyon üniteleri)	t	17 + 7	23 + 10	30 + 12	37 + 14	47 + 17

PLAKA BOYUTLARI

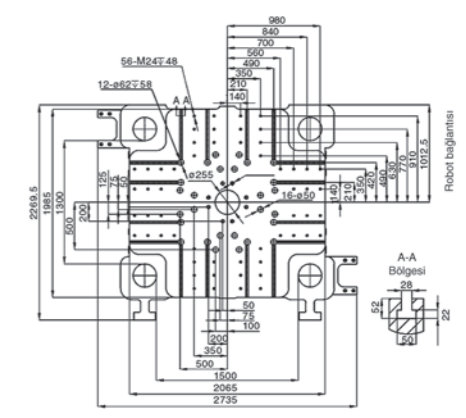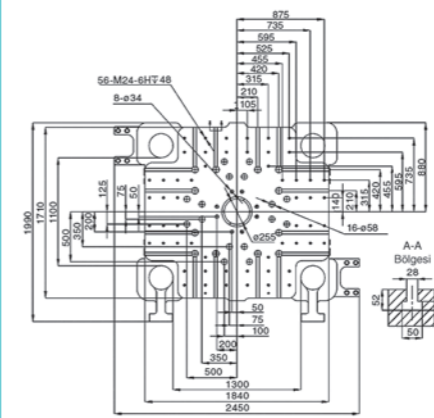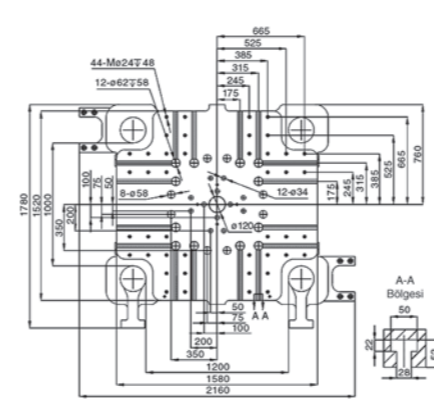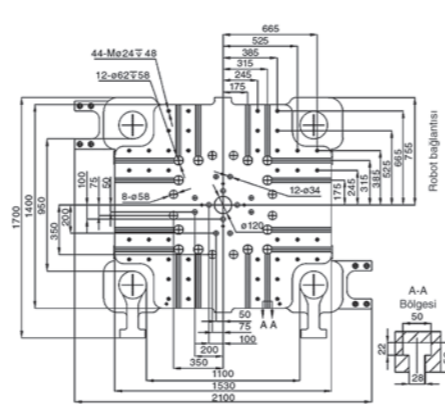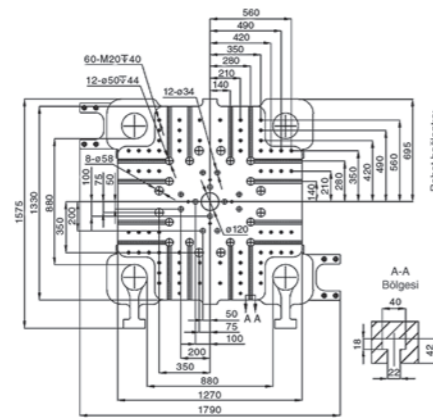

MENGENE PARAMETRELERİ

